

LOSCAM

Your Pooling Solutions Partner




Dynamic Shipper


Shipper with rising floor for easy picking and greater product visibility for in-store display.

Minimizes replenishment cost, maximizes in-store availability.

- An attractive, revolutionary, multi-purpose, "one-touch" bin for packaging, logistics and in-store display.
- Wheeled base enables safe and easy in-store handling.
- Rising floor for easy picking and easier filling
- Allows presenting new categories of soft or fragile products.
- Built in signage slots for promotional/logistics information.
- Robust construction ensures products are well protected.
- Uniquely designed to replace traditional shelving, eliminating both time & costs of replenishment.
- Foldable, nestable and stackable to optimize truck and storage space.
- Available with your own logo and in your desired color.
- Environmentally friendly.

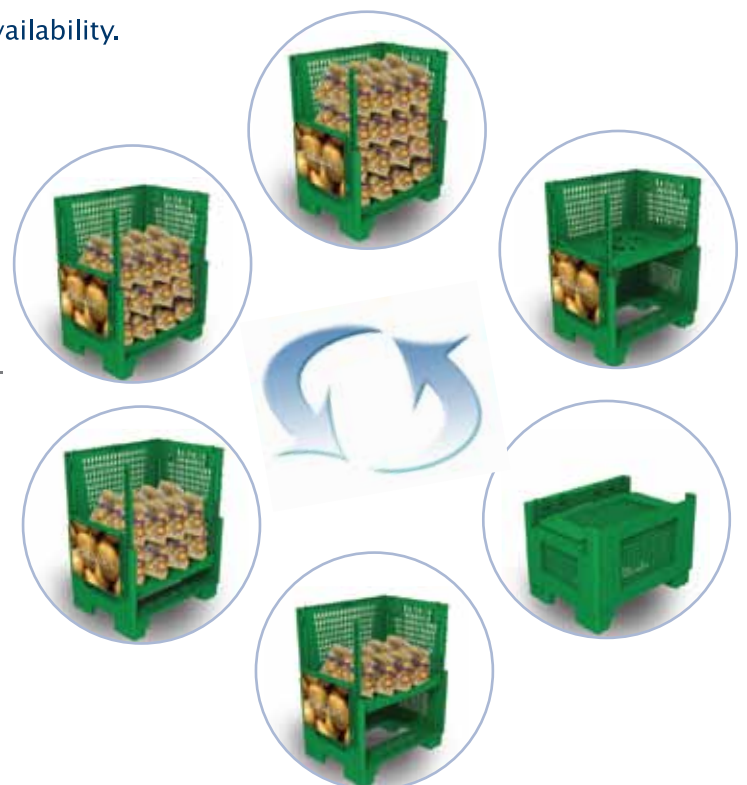

Technical details:

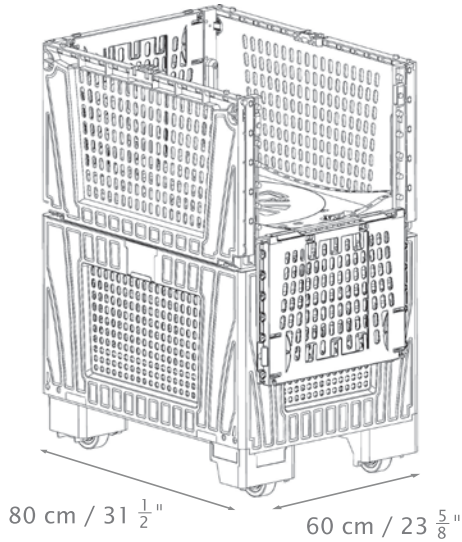

Dimensions (LxWxH)

External: 31 1/2" x 23 5/8" x 42 5/8" / 80 x 60 x 108.5 cm

Internal: 29 1/2" x 21 5/8" x 34 5/8" / 74.8 x 54.8 x 88.5 cm

When folded: 31 1/2" x 23 5/8" x 23 7/8" / 80 x 60 x 60.5 cm

Weight: 71.8 lbs / 32.6 kg

Load capacity: 551 lbs / 250 kg

Stacking capacity:

Static: 4 units (1,000 kg / 12,000 lbs)


Dynamic: 2 units (500 kg / 6,000 lbs)

Volume: 21,358 cubic/inch / 350 liter

Material: Base – High Density Polyethylene (HDPE)

Walls – High Density Polyethylene (HDPE)

Temp range: -4 °F to +120 °F / -20 °C to +50 °C

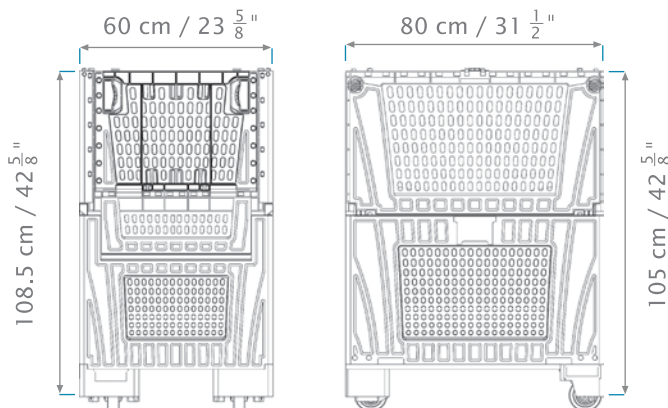

Retail Ready Packaging
The **ultimate** in cost savings

www.loscam.com

Corporate Office (852)2200 0688 | Greater China (86)755 2680 8820 | South East Asia (66)2613 0712
Australia (61)3 9843 3700 | New Zealand (64)21 756 339
info@loscam.com

* Loscam reserves the right to change any of the abovementioned specifications without prior notice

User Responsibility:

It is the responsibility of all users and hires to inform any other users concerning the details provided on this specifications sheet and the Loscam Health & Safety Guidelines. Users are responsible for completing Safe System Work and risk assessments prior to equipment use.